UVC40 Datasheet

All-in-One USB Video Bar for Small and Huddle Room

Yealink UVC40 is an all-in-one intelligent USB meeting device for small and huddle rooms. Featuring a 20MP camera and 133° super-wide-angle lens, UVC40 delivers outstanding video quality. Together with the electric lens cap, its AI technologies, including face detection, sound localization, and speaker tracking and so on, allow users to experience a smarter and safer video conference. With 8 MEMS microphone arrays and high fidelity speaker, UVC40 brings excellent call quality even in full-duplex mode. Moreover, UVC40 supports remote management on the Yealink Device Management Platform via its built-in Wi-Fi.



Key Features and Benefits

- 20MP camera with SONY 1-inch CMOS
- 133° super-wide-angle lens
- Electric lens cap
- 7m voice pickup range
- Built-in 8 MEMS microphone arrays
- Auto Framing and Speaker Tracking
- Built-in Wi-Fi, remote device management
- Applicable to most popular video conferencing Platforms

20 MP | SONY 1-inch CMOS | Super-Wide 133° Field of View

20 MP camera with SONY 1-inch CMOS brings UHD 4K video conference with delicate details. With a super-wide 133° field of view, everyone in the conference can be seen without adjusting the camera. Moreover, the image brightness can be automatically optimized even in a dim or backlight environment, ensuring participants' faces can be seen clearly.

Smart Video Conferencing with AI Technology

Featuring AI technology, including Auto Framing and Speaker Tracking, UVC40 not only supports framing the groups automatically according to the number and the position of the participants but also automatically zooms in on the speaker without adjusting the camera, making the participants more focus on the conference. Precise Sound Localization, Full-Duplex Experience

8 MEMS microphone arrays make UVC40 have a stronger noise-proof and dereverberation ability. The new upgraded beamforming algorithm, together with the technology of processing acoustic echo cancellation and the

Yealink

dereverberation, brings high-quality full-duplex calls and realizes more precise voice pickup.

Secure Conference with Electric Lens Cap

The camera's electric lens cap automatically opens when the video conference starts and remains closed when not having video conferences, securing your conference privacy.

Built-in Wi-Fi, Remote Device Management

UVC40 can connect to a network via its built-in Wi-Fi, realizing remote device management, configuration, diagnosis, and upgrade.

Compact Design for Fast Deployment

Integrating audio and video, UVC40 takes up less space and minimizes cable clutter, getting ready for a video conference with only the USB cable and the wall bracket.

Applicable to Most Popular Video Conferencing Platforms

As the standard UAC/UVC device, UVC40 applies to most video conferencing platforms.

Key Features and Benefits


Parameter	Description
Package Content	 UVC40 all-in-one USB video bar VCR20 Remote Control, 2 x AAA battery Power adapter Wall bracket and accessories 7m USB cable Optional: TV mount kit
Camera	 20MP Camera with SONY 1-inch CMOS DFOV: 133° HFOV: 120° VFOV: 80° 8x e-PTZ camera Electric lens cap Camera presets
Audio	 Built-in 8 MEMS microphone array Support extension mic 7m voice pickup range Built-in 5W high fidelity speaker Yealink Noise Proof Technology Beamforming directed voice pickup technology Full-deplex Echo cancellation
AI Technologies	 Auto Framing Speaker Tracking Al Face Enhancement
System Requirement	 Windows7, Windows8.1, Windows10, Mac OS 10.10 or higher Support for standard audio and video device drivers UAC1.0 UVC1.0

Yealink

	· 1 x USB3.0 Type-B port
UVC40 Connections	• 1 x USB2.0 Type-A port
	• 1 x Yealink microphone port (RJ-45)
	• 1x 3.5mm Line-in port
	· 1 x Power port
	• 1 x Security lock slot
	• 1 x Reset slot
	• Built-in Wi-Fi
	• Bluetooth 4.2
Manageability	· Yealink RoomConnect management tool
	Yealink USB Connect management tool
	· Yealink Management Cloud Service/Device Management Platform
Compatibility	· UVC40 is applicable to most video conferencing platforms, including but not
	limited to the following:
	-Microsoft Teams and Skype for Business
	-Zoom Room and Zoom client
	-BlueJeans
	-Google Meet
	-Cisco Webex
	-GoToMeeting
	-Tencent VooV Meeting
	-DingTalk
	-Yealink Meeting
	-Polycom
Product Dimension (W.D.H)	• UVC40: 600 mm x 68 mm x 82 mm
	N.W/CTN: 2.56 Kg
	• Wall Bracket: 127.5 mm x 143 mm x 82 mm
	N.W/CTN: 0.47 Kg
Other Physical	 External Yealink Power Adapter: AC 100~240V input and DC 48V/0.7A Output
	· Operating humidity: 10 - 95%
Features	 Operating temperature: 0 - 40°C

Hardware Interface Instructions

Yealink

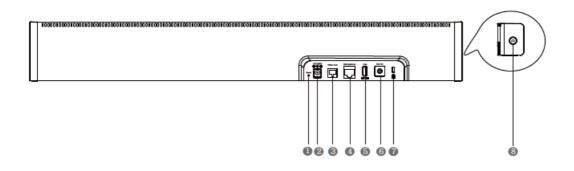

- Reset: reset the UVC40 to factory defaults.
- OC48V: connect to the power adapter.
- O Video Out: connect to a PC as video output.
- Ø Microphone: connect to the microphone (for example, VCM34).
- USB: come ready for.
- () Line In: connect a 3.5mm audio connector to use the UVC40 as an audio output device.
- Security slot: connect a universal security cable to the UVC40 so that you can lock the UVC40 down.
- Pairing key: press the pairing key to pair the CPW90 wireless microphone.

For more information, please go to the Yealink official website.